## Monitor 32" 4K UHD

L

Item no.: 0070-24132

### **PRODUCT CHARACTERISTICS**

- 4K HD solution
- Using all-imported industrial-grade LED screen
- Designed for CCTV
- High brightness, high contrast, high definition
- Adapts to the latest 3D digital filtering and 3D digital noise reduction technology

U


- Picture fast response
- 178° wide viewing angle
- Ensures that the image display is not deformed
- 24/7 working status, working continuously for 5 years
- Metal chassis design, anti-static, anti-magnetic field, anti-interference, no radiation
- Menu with convenient Controller



ernitec

ernitec

#### **DIMENSIONS (MM)**

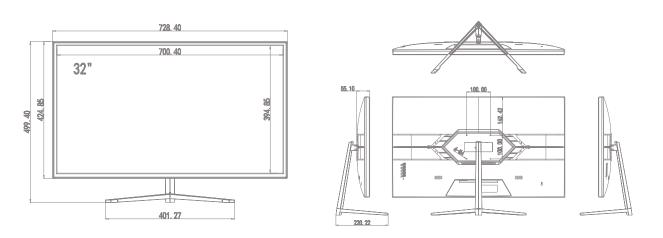



## MONITOR 32" 4K UHD

# Monitor 32" 4K UHD

| DISPLAY CHARACTERISTICS  |                            |
|--------------------------|----------------------------|
| Mode name                | 0070-24132                 |
| Screen size              | 32"                        |
| Active display area (mm) | 697.6845mm(W)×392.256mm(H) |
| Display mode             | 16:9                       |
| Led type                 | TFT-LED                    |
| Resolution               | 3840 × 2160                |
| Display colour           | 1.073G                     |
| Pixel pitch (mm)         | 0.294(H)×0.294(V)          |
| Brightness (nits)        | 350cd/m <sup>2</sup>       |
| Contrast ratio           | 1000:1                     |
| Viewing angle            | 170(H) /170(V)             |
| Response time            | 5ms                        |
| Backlight                | LED                        |

| INPUT & OUTPUT            |               |
|---------------------------|---------------|
| HDMI 2.0                  | 3             |
| DP                        | 1             |
| Power input               | 1             |
| USB (software using only) | 1             |
| Speaker                   | 2x 3W(Stereo) |

| VIDEO                 |   |
|-----------------------|---|
| Colour system         | PAL/NTSC/SECAM  |
| OSD control           | Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock,<br>Phase, Color, Language |
| 3D comb filter        | YES   |
| Video noise reduction | YES   |

| POWER & MOUNT       |  |  |
|---------------------|--|--|
| Power               | 12V, 5A  |  |
| Working temperature | -30 to +85 °C  |  |
| Power consumption   | <35W   |  |
| Menu                | English, German, French                                |  |
| Mounting            | Stand mount, VESA mount                                |  |
| Mtbf                | 50000 Hours  |  |
| Accessories         | Industrial PSU, screw, cable holder, quick start guide |  |
| Warranty            | 5 years  |  |



ernitec